


WATERPACK

CABLE

- 1.5mm² 4 core submersible insulated cable.
- SABS approved.

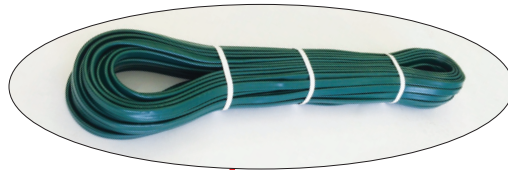



CONTROL BOX

- Pump protection and control for direct start up.
- Thermal protection with external manual reset.



CABLE JOINT

- MX1 epoxy cable joint kit.

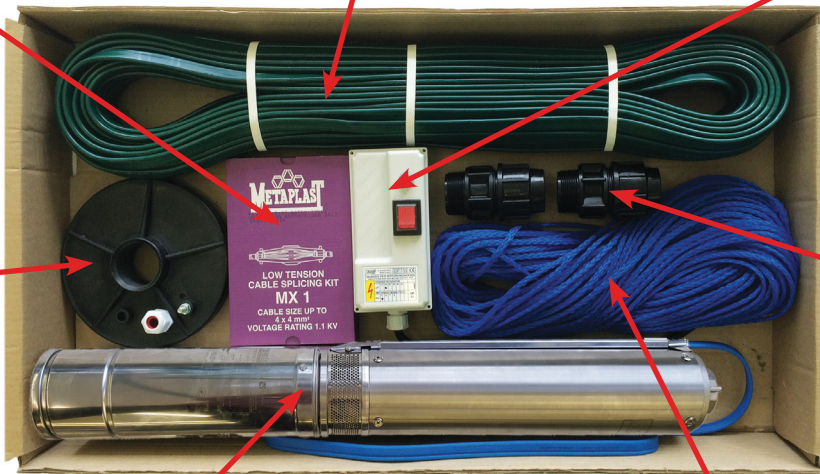


BASEPLATE

- 40mm base-plate with integrated cable gland.



MALE ADAPTORS

- Mechanical compression fittings are designed to withstand working pressures of up to 16bar.

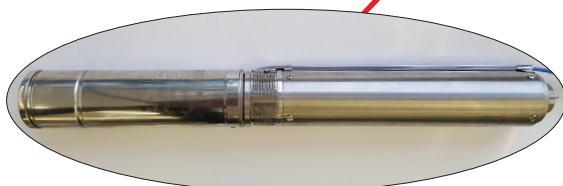

WET-END

- Base and upper support in technopolymer with build in non-return valve.

MOTOR

- Tesla 4OL submersible motor made in AISI 304 stainless steel for parts in contact with water.
- Complete with removable lead out cable.



NYLON ROPE

- 6mm nylon safety rope.

WATERPACK	230 V	WET END	CABLE LENGTH	Q = DELIVERY						
				l/min 0	20	25	30	40	50	
				m ³ /h 0	1,2	1,5	1,8	2,4	3	
H = TOTAL HEAD METERS COLUMN OF WATER										
DAB 2	0.37kW	S4-2/7	50m	47	42	40	36	29	19	
DAB 3	0.56kW	S4-2/10	70m	67	60	56	52	41	27	
DAB 4	0.75kW	S4-2/14	70m	93	83	79	73	57	37	