



Construction

Close-coupled, single-impeller, centrifugal pumps; electric motor with extended shaft directly connected to the pump. Pump casing with suction and delivery connections with the same diameter and on the same axis (in-line).

Connections: Flanges PN 10, EN 1092-2.

Counterflanges (on request)

| Sizes | Flanges |
|--------------------|--------------------------------------|
| NR, NR4 40, 50, 65 | Screwed flanges PN 16, EN 1092-1 |
| NR4 100, NR4 125 | Flanges for welding PN 10, EN 1092-1 |

5

Applications

For clean liquids, without abrasives, which are non-aggressive for the pump materials (contents of solids up to 0.2%).

For heating, conditioning, cooling and circulation plants.

For civil and industrial applications.

When low noise operation is required (n = 1450 rpm).

Operating conditions

Liquid temperature from -10 °C to +90 °C.

Ambient temperature up to 40 °C.

Total suction lift up to 7 m.

Maximum permissible working pressure up to 10 bar.

Continuous duty.

Materials

| Component | Material |
|--------------------------------|---|
| Pump casing Lantern bracket | Cast iron GJL 200 EN 1561 |
| Impeller | Cast iron GJL 200 EN 1561 (Brass P-Cu Zn Pb 2 EN 1982 for NR-NR4 50, NR-NR4 50/200) |
| Shaft | Chrome-nickel steel AISI 303 for pumps up to 1.1 kW Chrome steel AISI 430 for pumps from 1.5 to 4 kW |
| Mecanical seal | Carbon - Ceramic - NBR |
| Counterflanges | Steel Fe 42 UNI 7070 |

Special features on request

- Other voltages. - Protection IP 55. - Higher or lower liquid or ambient temperatures.
- Special mechanical seal. - Motor suitable operation with frequency converter.

Motor

4-pole induction motor, 50 Hz (n = 1450 rpm).

NR4: three-phase 230/400 V ± 10% up to 3 kW;
400/690 V ± 10% for 4 kW.

NRM4: single-phase 230 V ± 10%.

2-pole induction motor, 50 Hz (n = 2900 rpm).

NR: three-phase 230/400 V ± 10% up to 3 kW;
400/690 V ± 10% from 4 to 18,5 kW.

NRM: single-phase 230 V ± 10%.



Insulation class F.

Protection IP 54.

Classification scheme IE2 for three-phase motor from 0,75 kW.

Constructed in accordance with EN 60034-1, EN 60034-30.
EN 60335-1, EN 60335-2-41.

Coverage chart

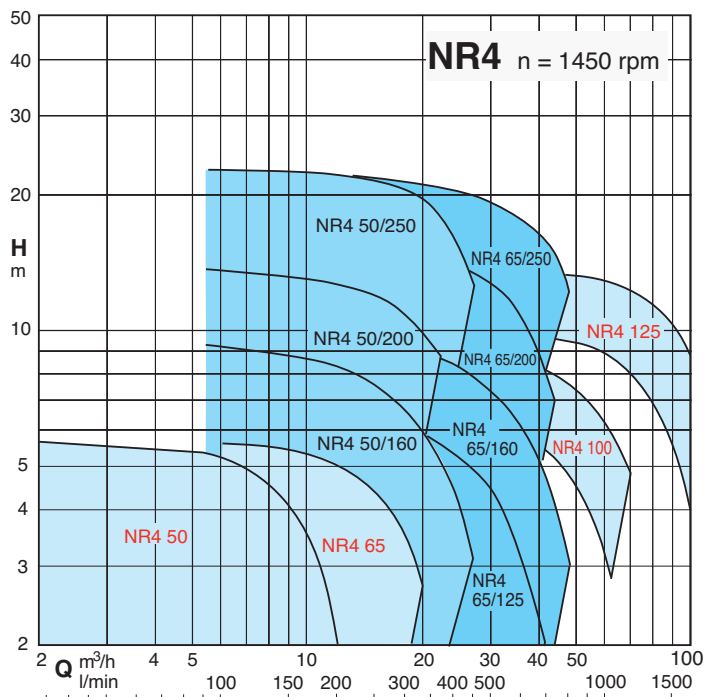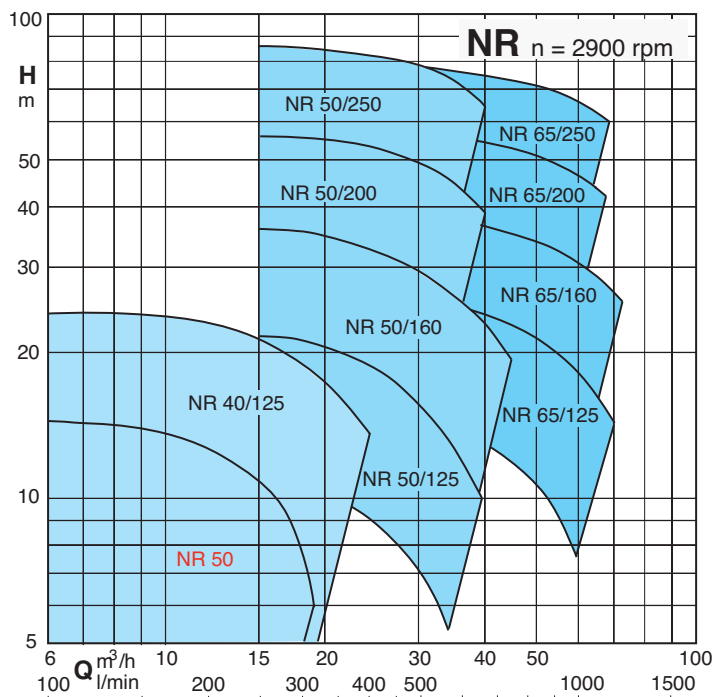

Performance n ≈ 1450 rpm

| 3 ~ | 230V 400V | | 1 ~ | 230V P1 | | P2 | | Q m³/h | | | | | | | | | | | | | | | | | | | |
|-----------|-----------|-----|------------|---------|------|------|------|-----------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|--|--|--|--|
| | A | A | | A | kW | kW | HP | | 0 2 4 6 8 10 12 14 16 18 20 25 | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | l/min 0 33 67 100 133 167 200 233 267 300 333 417 | | | | | | | | | | | | | | | | | | |
| NR4 50C/A | 1,4 | 0,8 | NR4M 50C/A | 2,1 | 0,27 | 0,25 | 0,34 | H | 3,9 | 3,9 | 3,8 | 3,3 | 2,5 | | | | | | | | | | | | | | |
| NR4 50B/A | 1,4 | 0,8 | NR4M 50B/A | 2,1 | 0,29 | 0,25 | 0,34 | m | 4,7 | 4,7 | 4,6 | 4,3 | 3,5 | 2,3 | | | | | | | | | | | | | |
| NR4 50A/A | 1,4 | 0,8 | NR4M 50A/A | 2,1 | 0,33 | 0,25 | 0,34 | | 5,6 | 5,6 | 5,5 | 5,2 | 4,5 | 3,5 | 2 | | | | | | | | | | | | |
| NR4 65C/A | 1,4 | 0,8 | NR4M 65C/A | 2,1 | 0,31 | 0,25 | 0,34 | | 3,8 | | | 3,8 | 3,7 | 3,5 | 3,1 | 2,6 | 1,9 | | | | | | | | | | |
| NR4 65B/A | 2,1 | 1,2 | | | | 0,37 | 0,5 | | 4,7 | | | 4,7 | 4,6 | 4,5 | 4,2 | 3,8 | 3,2 | 2,5 | | | | | | | | | |
| NR4 65A/A | 2,1 | 1,2 | | | | 0,37 | 0,5 | | 5,6 | | | 5,6 | 5,5 | 5,3 | 5 | 4,6 | 4,1 | 3,5 | 2,7 | | | | | | | | |

5



| 3 ~ | 230V 400V | | P2 | Q m³/h | | | | | | | | | | | | | | | | | | | | | | | |
|---------------|-----------|------|----|-----------|------|----|--|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|--|--|--|--|--|
| | A | A | | | kW | HP | 0 5,4 6 7,5 8,4 9,6 10,8 12 13,2 15 16,8 18,9 21 24 27 30 | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | l/min 0 90 100 125 140 160 180 200 220 250 280 315 350 400 450 500 | | | | | | | | | | | | | | | | | | | | |
| NR4 50/160C | 1,6 | 0,92 | | 0,37 | 0,5 | H | 5,9 | 5,9 | 5,8 | 5,7 | 5,6 | 5,4 | 5,2 | 5 | 4,7 | 4,2 | 3,7 | 3,1 | 2,3 | | | | | | | | |
| NR4 50/160B | 2,6 | 1,5 | | 0,55 | 0,75 | m | 7,3 | 7,4 | 7,4 | 7,2 | 7,1 | 6,9 | 6,7 | 6,4 | 6,2 | 5,7 | 5,2 | 4,5 | 3,8 | 2,5 | | | | | | | |
| NR4 50/160A/A | 3,3 | 1,9 | | 0,75 | 1 | | 9,2 | 9,2 | 9,2 | 9,1 | 9 | 8,9 | 8,7 | 8,4 | 8,2 | 7,6 | 7,1 | 6,4 | 5,6 | 4,4 | 3,1 | | | | | | |
| NR4 50/200B/A | 5 | 2,9 | | 1,1 | 1,5 | | 12,8 | 12,6 | 12,5 | 12,3 | 12,1 | 11,9 | 11,5 | 11,2 | 10,7 | 10 | 9,2 | 8,2 | 7,1 | 5,2 | | | | | | | |
| NR4 50/200A/A | 5 | 2,9 | | 1,1 | 1,5 | | 14,3 | 14,1 | 14 | 13,9 | 13,7 | 13,5 | 13,2 | 12,8 | 12,4 | 11,7 | 11 | 10 | 8,8 | 7,3 | | | | | | | |
| NR4 50/250C/A | 6 | 3,5 | | 1,5 | 2 | | 17,1 | 17 | 16,9 | 16,6 | 16,4 | 16,1 | 15,9 | 15,6 | 15,2 | 14,6 | 13,9 | 12,8 | 11,3 | 8,5 | 5,3 | | | | | | |
| NR4 50/250B/A | 8,6 | 5 | | 2,2 | 3 | | 21 | 20,9 | 20,8 | 20,5 | 20,3 | 20 | 19,7 | 19,4 | 19 | 18,4 | 17,8 | 16,8 | 15,6 | 13,8 | 11,7 | 8,5 | | | | | |
| NR4 50/250A/A | 11,1 | 6,4 | | 3 | 4 | | 22 | 21,9 | 21,9 | 21,8 | 21,6 | 21,4 | 21,1 | 20,9 | 20,5 | 19,9 | 19,2 | 18,3 | 17,2 | 15,3 | 13,4 | 11 | | | | | |

| 3 ~ | 230V 400V | | P2 | Q m³/h | | | | | | | | | | | | | | | | | | | | | | |
|---------------|-----------|------|----|-----------|------|----|---|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|--|--|--|--|--|
| | A | A | | | kW | HP | 0 10,8 12 13,2 15 16,8 18,9 21 24 27 30 33 37,5 42 48 | | | | | | | | | | | | | | | | | | | |
| | | | | | | | l/min 0 180 200 220 250 280 315 350 400 450 500 550 630 700 800 | | | | | | | | | | | | | | | | | | | |
| NR4 65/125F | 1,65 | 0,95 | | 0,37 | 0,5 | H | 4,1 | 3,9 | 3,85 | 3,8 | 3,6 | 3,5 | 3,3 | 3 | 2,6 | 2,1 | 1,6 | 1 | | | | | | | | |
| NR4 65/125D | 2,6 | 1,5 | | 0,55 | 0,75 | m | 5,3 | 5 | 5 | 4,9 | 4,8 | 4,7 | 4,5 | 4,3 | 3,9 | 3,4 | 2,9 | 2,4 | 1,5 | | | | | | | |
| NR4 65/125A/A | 3,3 | 1,9 | | 0,75 | 1 | | 6,3 | 6,2 | 6,1 | 6 | 5,9 | 5,8 | 5,7 | 5,5 | 5,1 | 4,6 | 4,1 | 3,5 | 2,6 | 1,5 | | | | | | |
| NR4 65/125S/A | 3,3 | 1,9 | | 0,75 | 1 | | 6,8 | 6,6 | 6,6 | 6,5 | 6,4 | 6,3 | 6,1 | 5,9 | 5,6 | 5,1 | 4,6 | 4,1 | 3,2 | 2,1 | | | | | | |
| NR4 65/160B/A | 5 | 2,9 | | 1,1 | 1,5 | | 8,2 | 8,2 | 8,2 | 8,1 | 8 | 7,9 | 7,7 | 7,5 | 7,1 | 6,6 | 6 | 5,4 | 4,3 | 3,2 | | | | | | |
| NR4 65/160A/A | 5 | 2,9 | | 1,1 | 1,5 | | 9,7 | 9,6 | 9,5 | 9,5 | 9,4 | 9,2 | 9 | 8,8 | 8,5 | 8 | 7,4 | 6,8 | 5,8 | 4,7 | 3 | | | | | |
| NR4 65/200C/A | 5 | 2,9 | | 1,1 | 1,5 | | 11,4 | 11,3 | 11,2 | 11,1 | 10,8 | 10,6 | 10,3 | 9,9 | 9,4 | 8,7 | 7,9 | 7 | 5,3 | 3,4 | | | | | | |
| NR4 65/200B/A | 6 | 3,5 | | 1,5 | 2 | | 13,3 | 13,1 | 13 | 12,9 | 12,7 | 12,4 | 12,1 | 11,8 | 11,2 | 10,5 | 9,7 | 8,9 | 7,2 | 5,4 | | | | | | |
| NR4 65/200A/A | 8,6 | 5 | | 2,2 | 3 | | 14,5 | 14,6 | 14,5 | 14,4 | 14,2 | 13,9 | 13,6 | 13,2 | 12,7 | 12 | 11,3 | 10,5 | 9 | 7,2 | | | | | | |
| NR4 65/250D/A | 8,6 | 5 | | 2,2 | 3 | | 13,7 | 13,9 | 13,8 | 13,8 | 13,6 | 13,4 | 13,1 | 12,8 | 12,3 | 11,6 | 10,9 | 10,1 | 8,6 | 7,2 | | | | | | |
| NR4 65/250C/A | 8,6 | 5 | | 2,2 | 3 | | 17,1 | 17,3 | 17,2 | 17,2 | 16,9 | 16,7 | 16,3 | 16 | 15,4 | 14,7 | 13,9 | 13 | 11,4 | 10 | | | | | | |
| NR4 65/250B/A | 11,1 | 6,4 | | 3 | 4 | | 19,9 | 20,1 | 20 | 20 | 19,8 | 19,6 | 19,3 | 19 | 18,4 | 17,7 | 16,9 | 16,1 | 14,6 | 13,2 | 10,8* | | | | | |
| NR4 65/250A/A | 14,4 | 8,3 | | 4 | 5,5 | | 21,4 | 21,6 | 21,5 | 21,4 | 21,3 | 21,1 | 20,8 | 20,5 | 19,9 | 19,2 | 18,4 | 17,6 | 16,1 | 14,7 | 12,2* | | | | | |





| 3 ~ | 230V 400V | | P2 | Q m³/h | | | | | | | | | | | | | | | | | | | | | |
|------------|-----------|-----|----|-----------|-----|----|---|-----|-----|------|------|------|------|------|------|------|------|-----|-----|--|--|--|--|--|--|
| | A | A | | | kW | HP | 0 20 25 30 35 40 50 60 70 80 90 100 110 | | | | | | | | | | | | | | | | | | |
| | | | | | | | l/min 0 333 417 500 583 667 833 1000 1167 1333 1500 1667 1840 | | | | | | | | | | | | | | | | | | |
| NR4 100C/A | 5 | 2,9 | | 1,1 | 1,5 | H | 6,6 | 6,6 | 6,4 | 6,3 | 6 | 5,6 | 4,6 | 3,3 | | | | | | | | | | | |
| NR4 100B/A | 5 | 2,9 | | 1,1 | 1,5 | m | 7,5 | 7,5 | 7,4 | 7,2 | 7 | 6,6 | 5,6 | 4,4 | | | | | | | | | | | |
| NR4 100A/A | 6 | 3,5 | | 1,5 | 2 | | 9 | 9 | 8,9 | 8,8 | 8,6 | 8,3 | 7,4 | 6,2 | 4,8 | | | | | | | | | | |
| NR4 125C/A | 8,6 | 5 | | 2,2 | 3 | | 10,2 | | | 10,2 | 10,1 | 10 | 9,6 | 9 | 8,2 | 7,1 | 5,7 | 4 | | | | | | | |
| NR4 125B/A | 11,1 | 6,4 | | 3 | 4 | | 12 | | | 12 | 11,9 | 11,8 | 11,6 | 11 | 10,4 | 9,4 | 8,2 | 6,7 | 5,1 | | | | | | |
| NR4 125A/A | 14,4 | 8,3 | | 4 | 5,5 | | 13,6 | | | 13,6 | 13,5 | 13,4 | 13,2 | 12,9 | 12,3 | 11,4 | 10,3 | 8,8 | 7,2 | | | | | | |

P1 Max. power input. P2 Rated motor power output. Tolerances according to ISO 9906, annex A.





Characteristic curves $n \approx 2900$ rpm

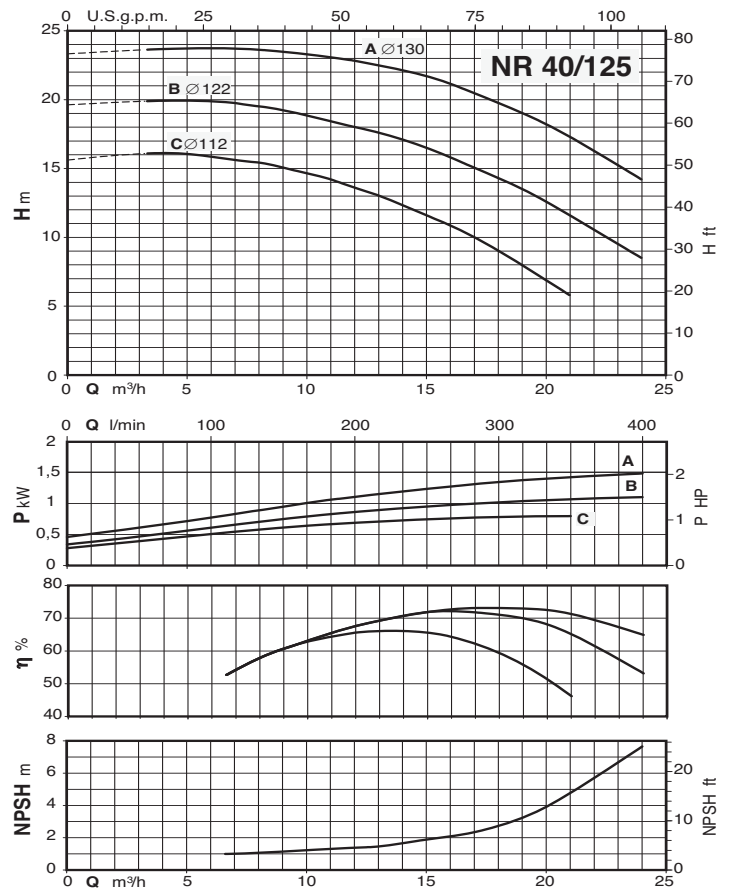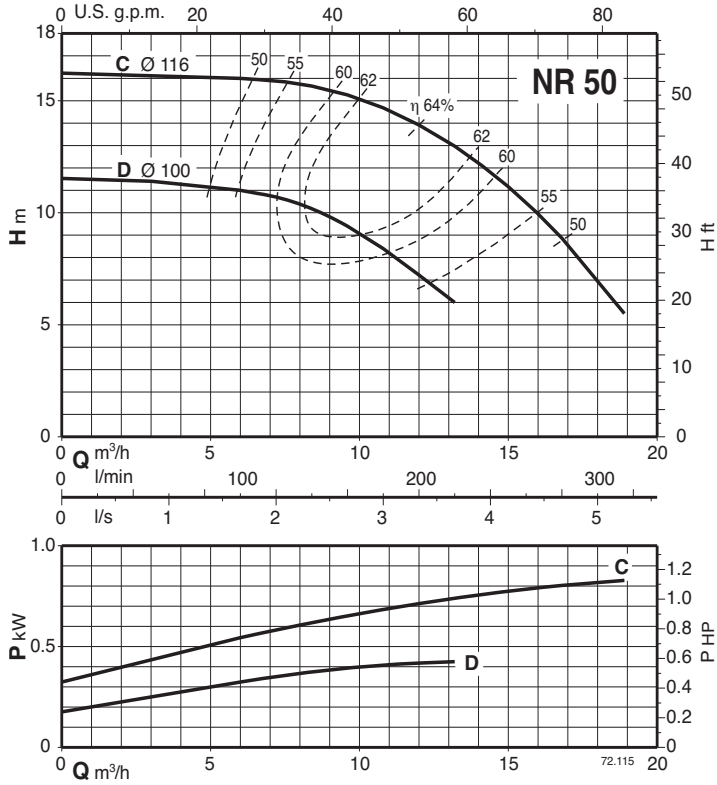



Characteristic curves $n \approx 2900$ rpm

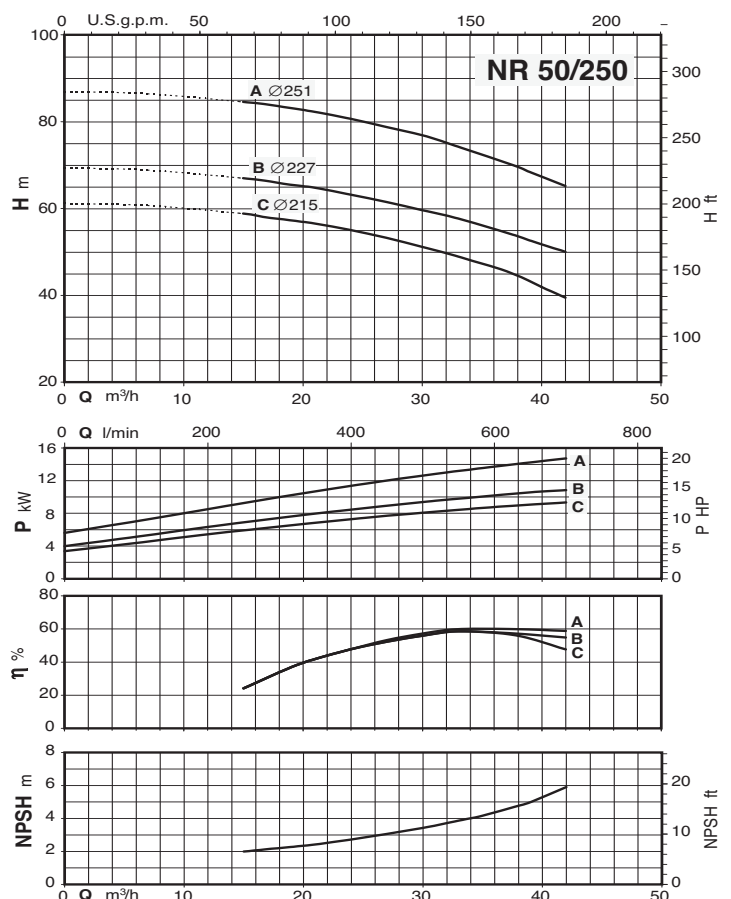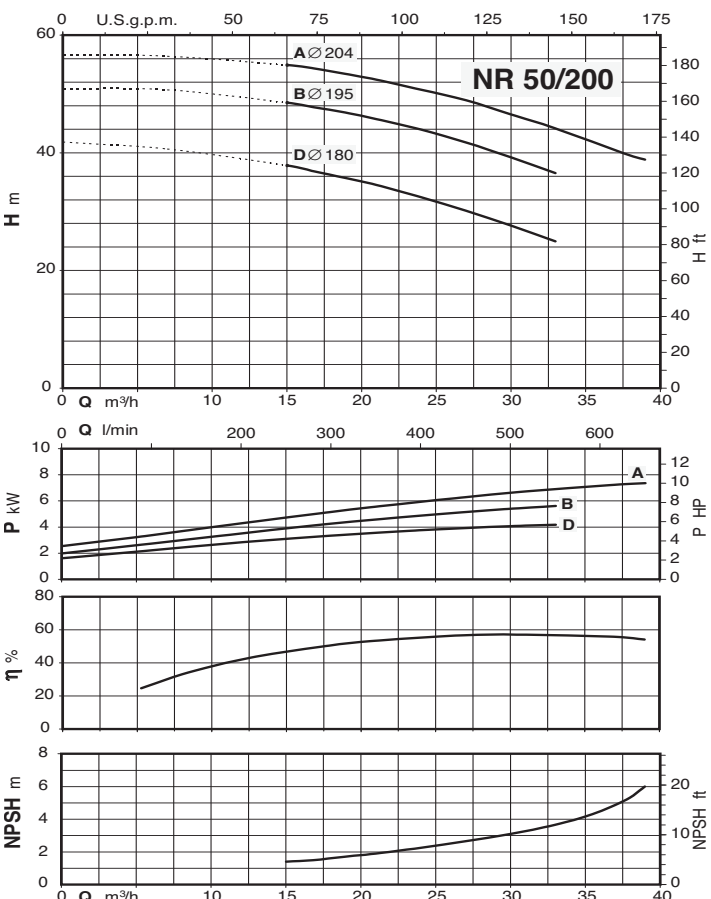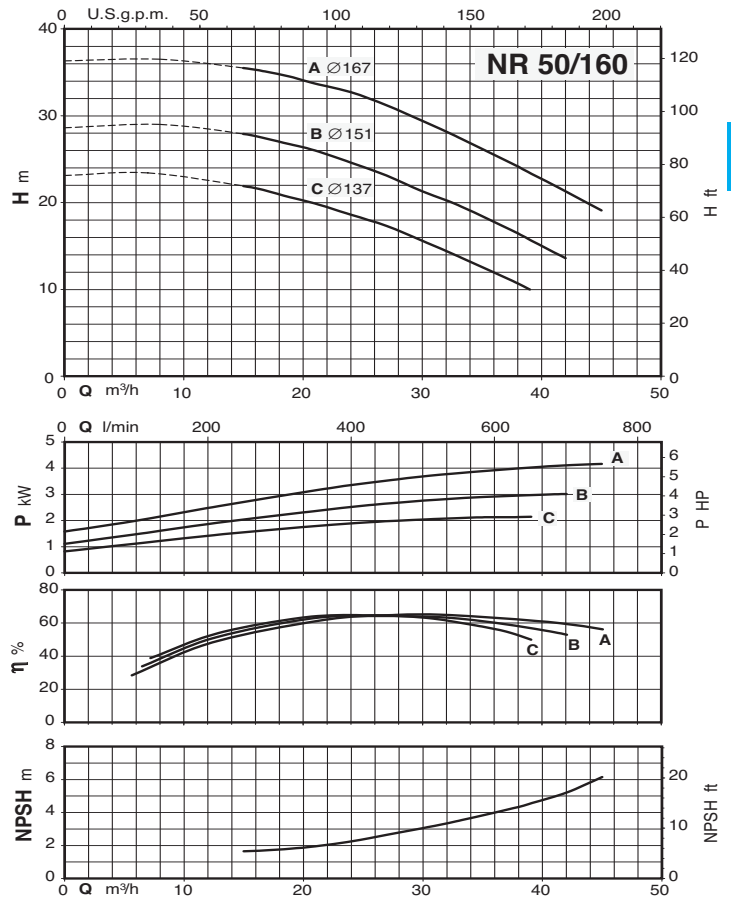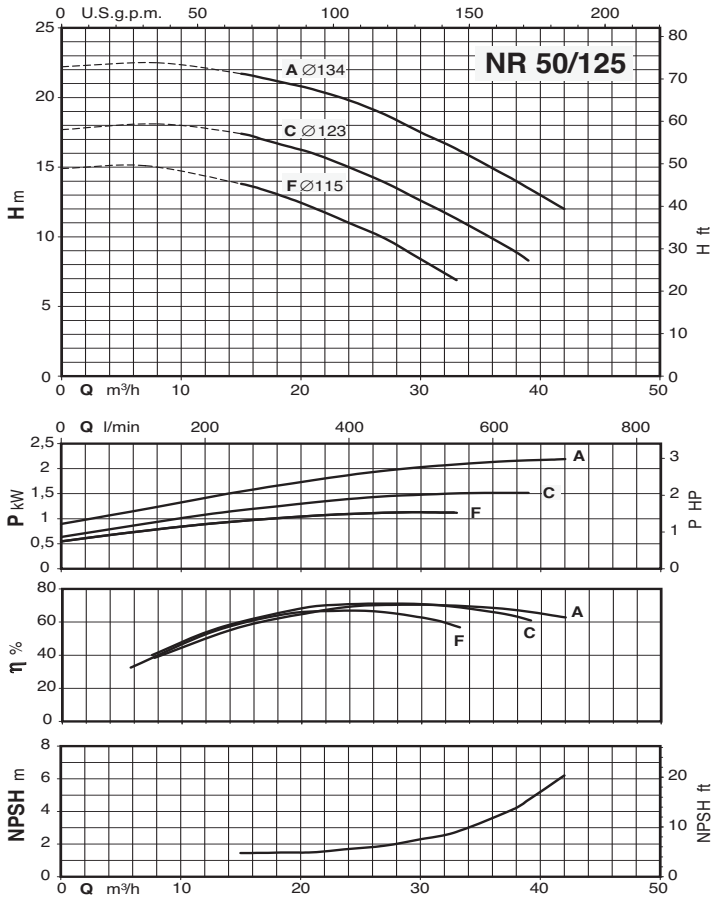

Characteristic curves $n \approx 2900$ rpm

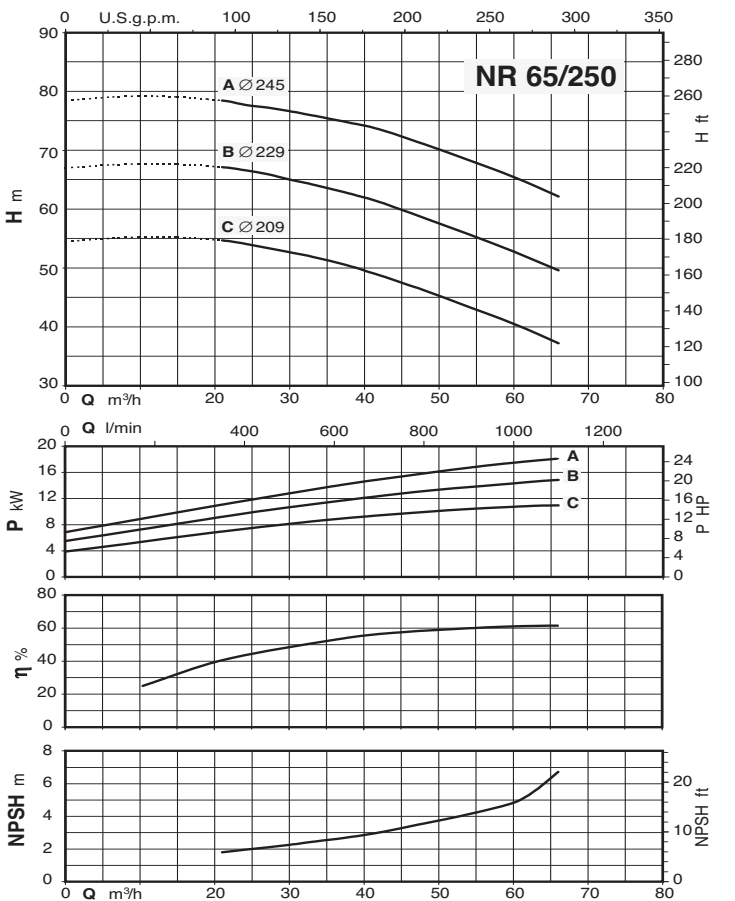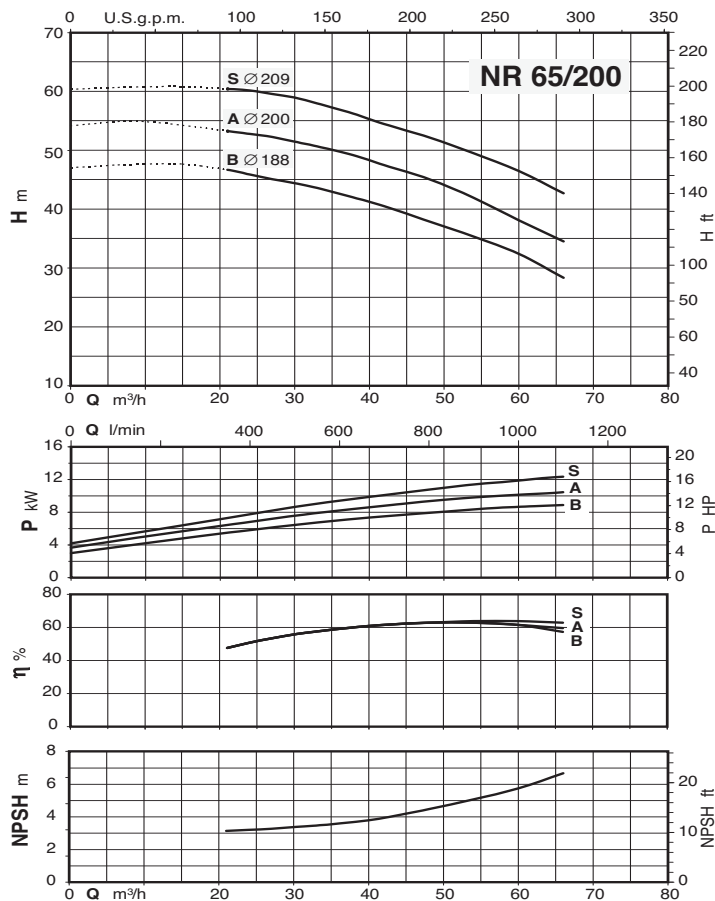
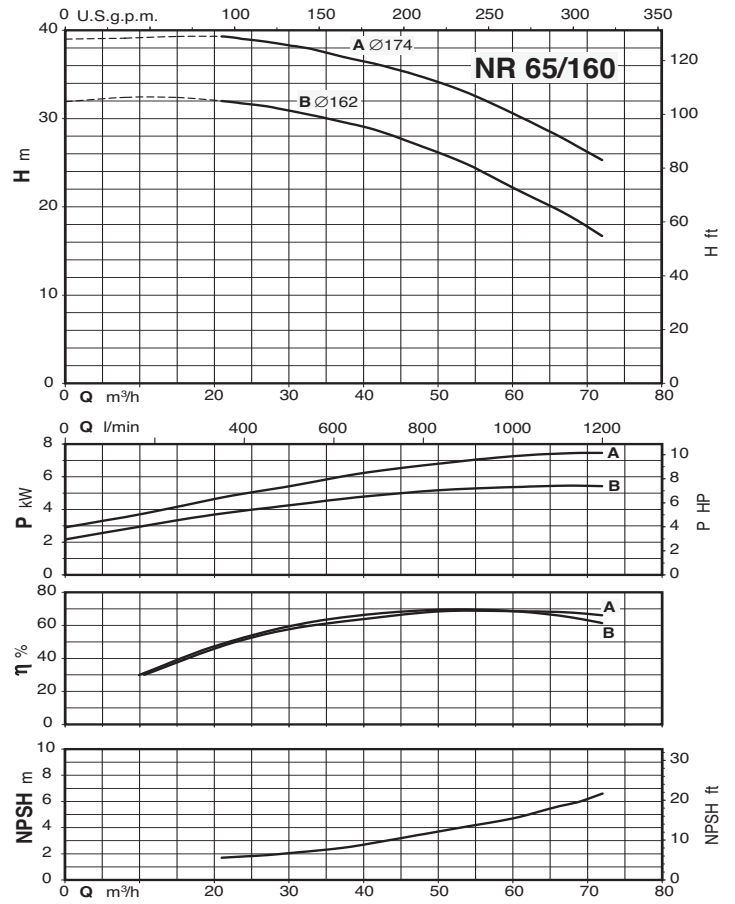
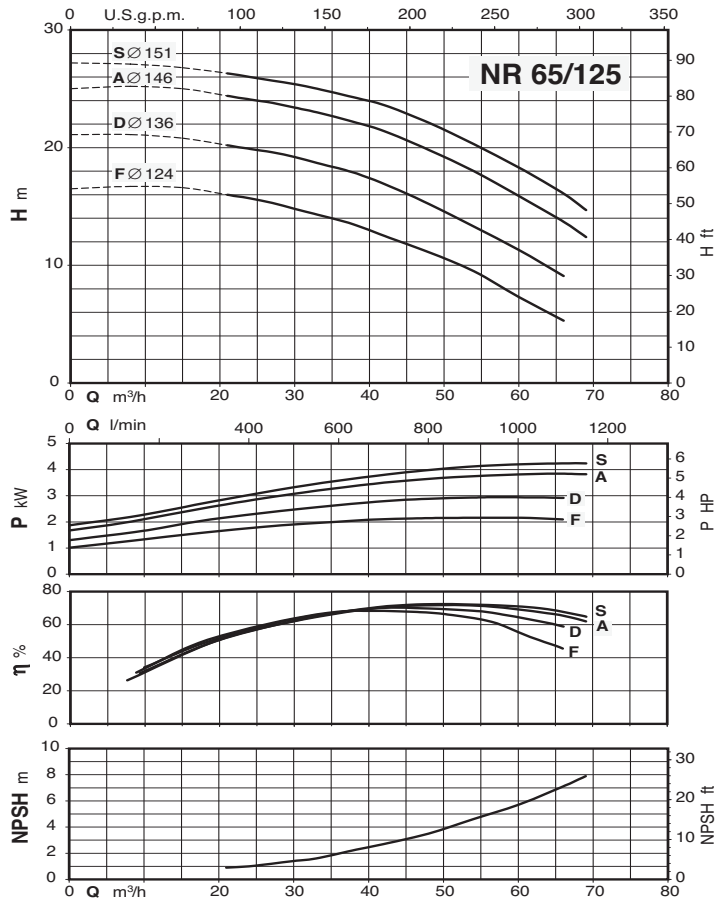


Characteristic curves $n \approx 1450$ rpm















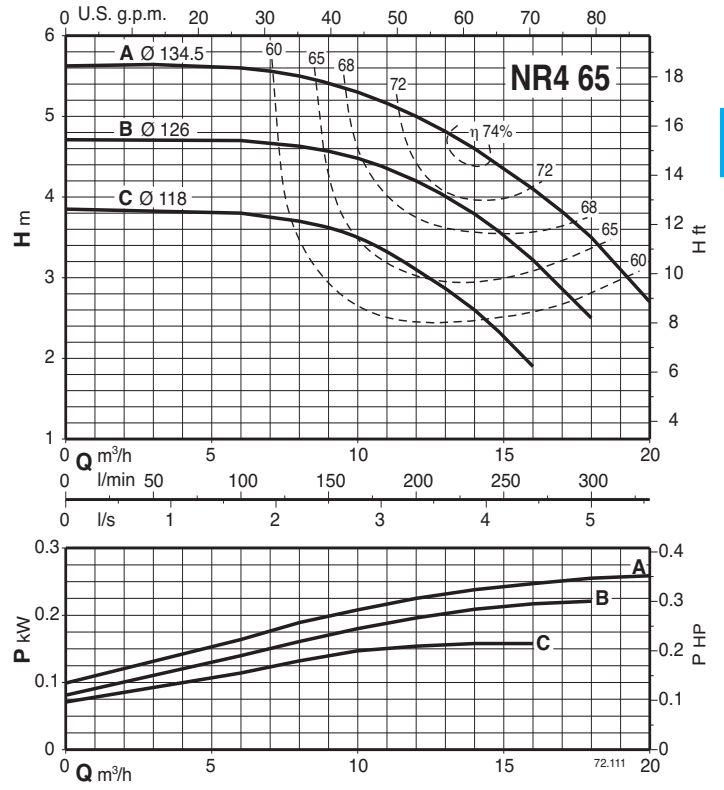
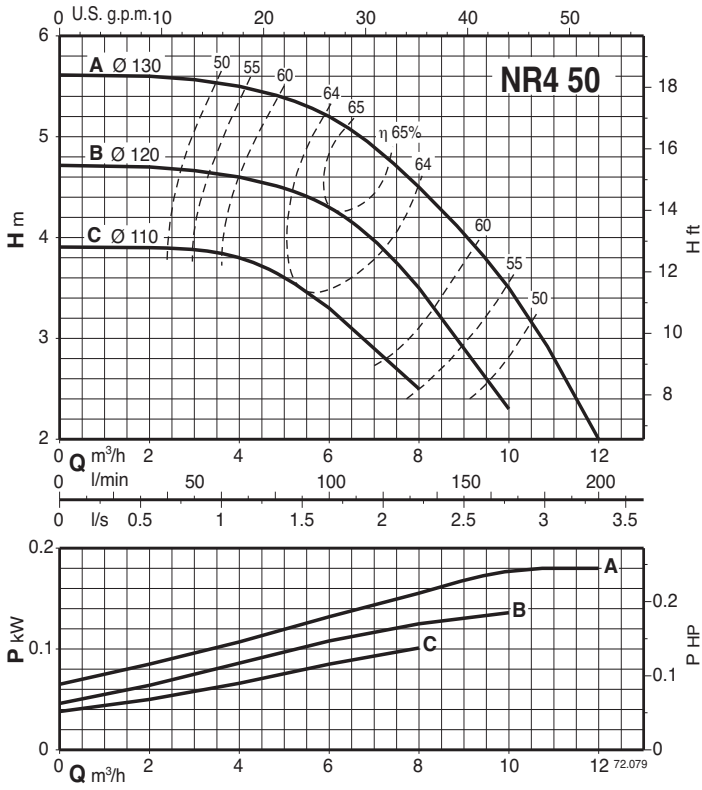


5



Characteristic curves $n \approx 1450$ rpm

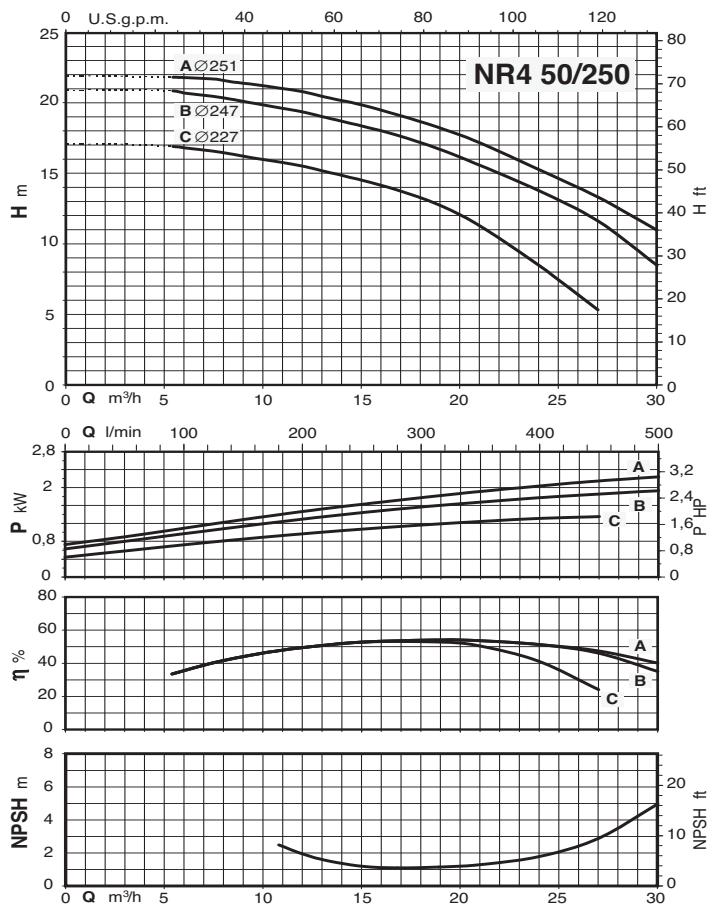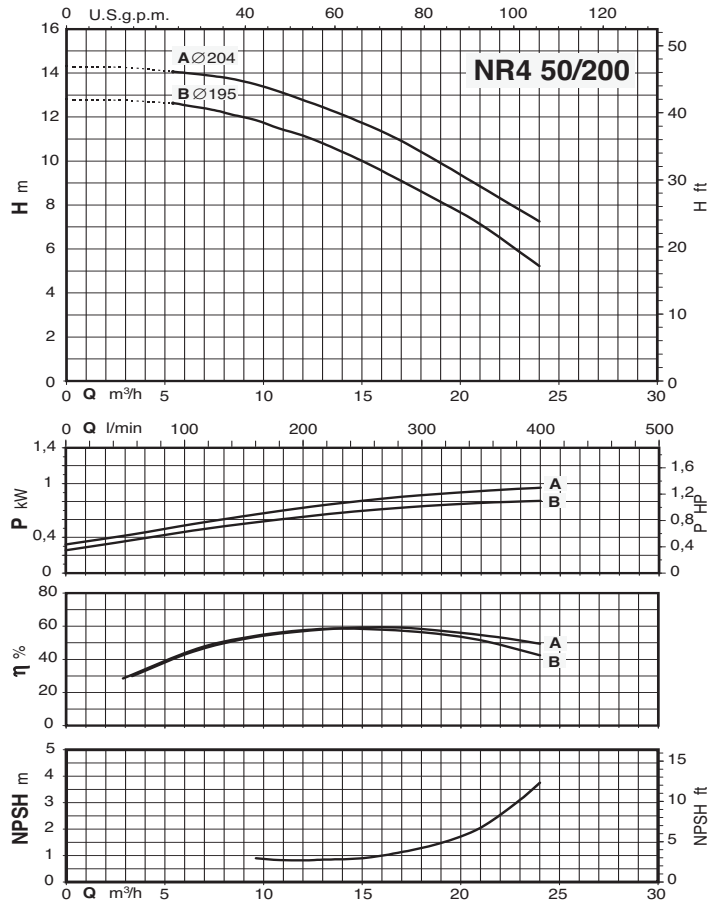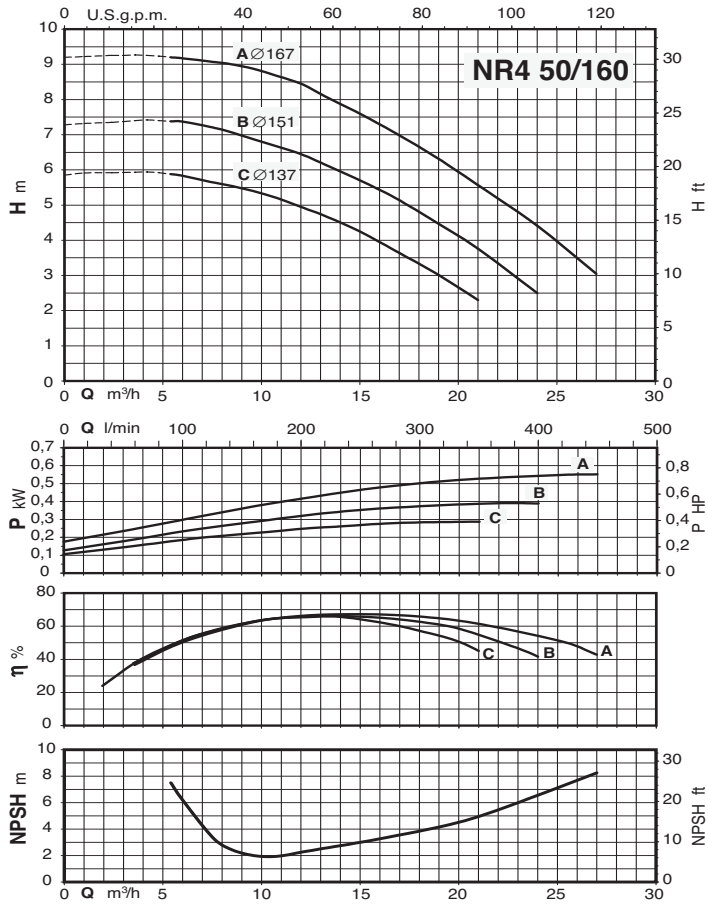




Characteristic curves $n \approx 1450$ rpm

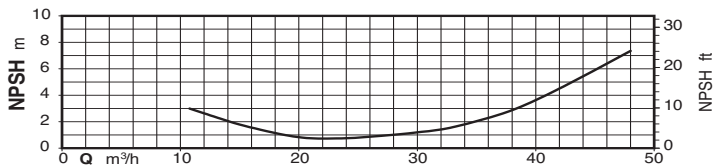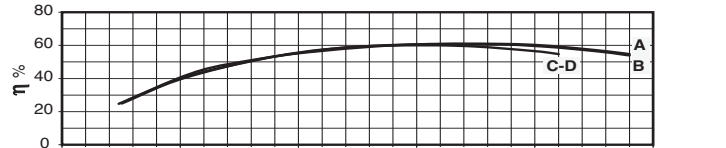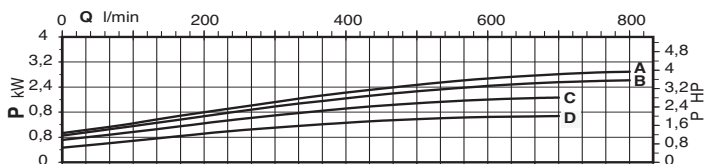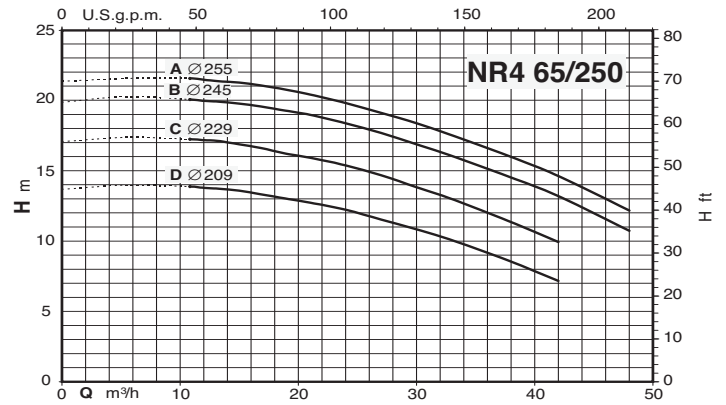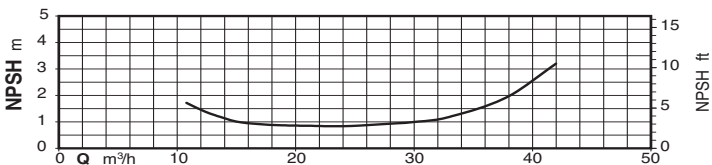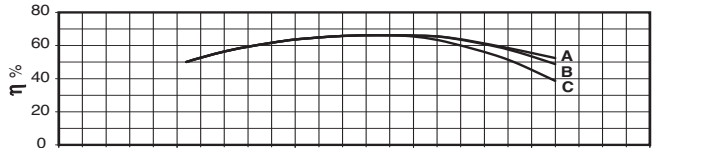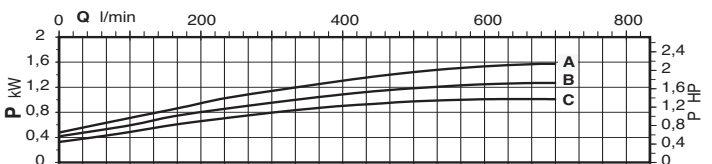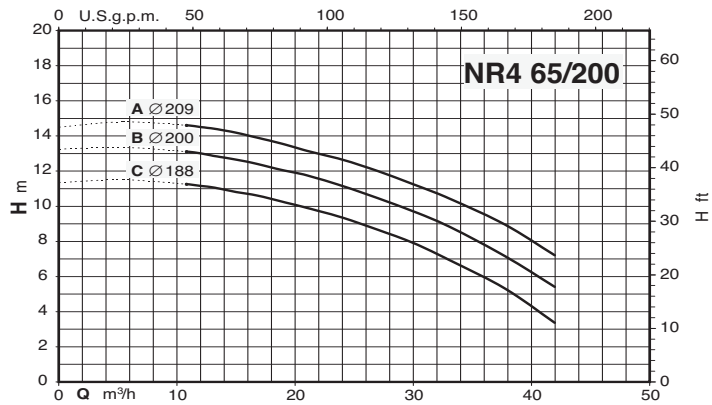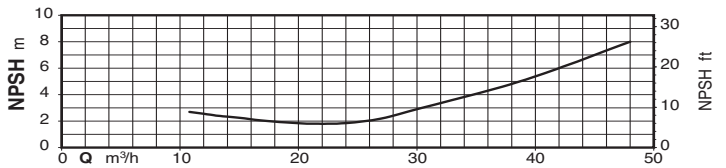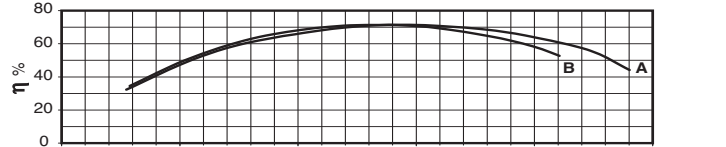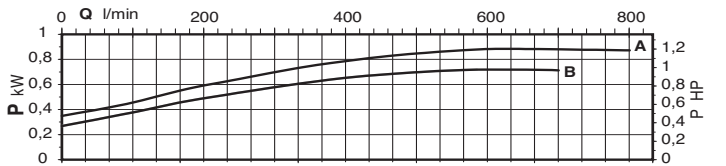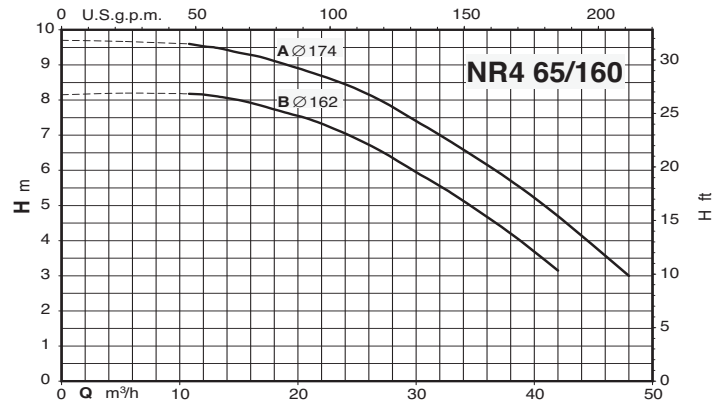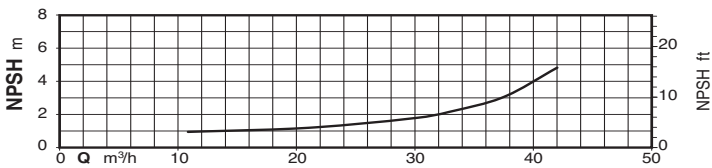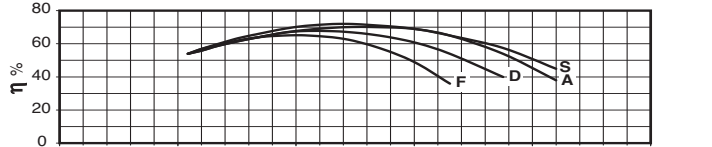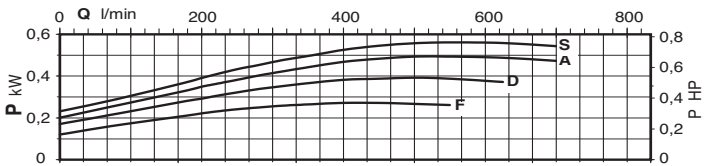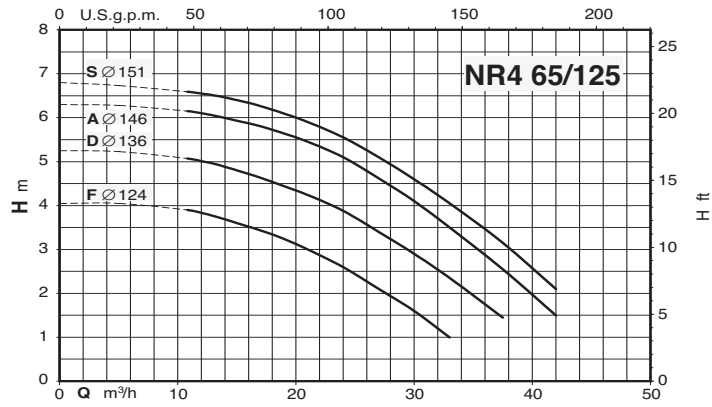

Characteristic curves $n \approx 1450$ rpm

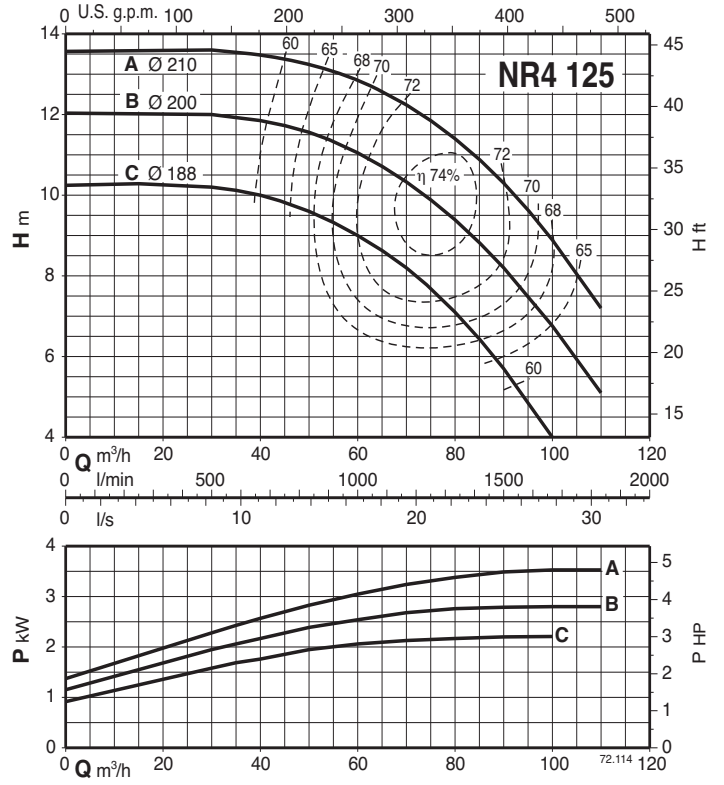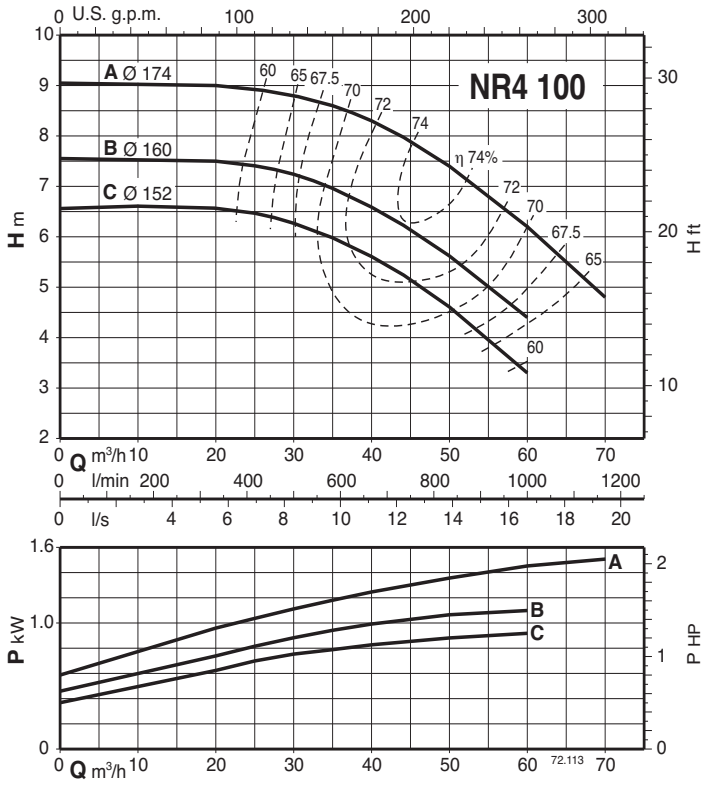


Dimensions and weights

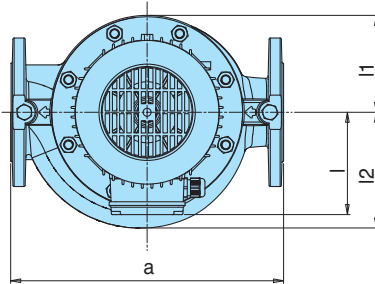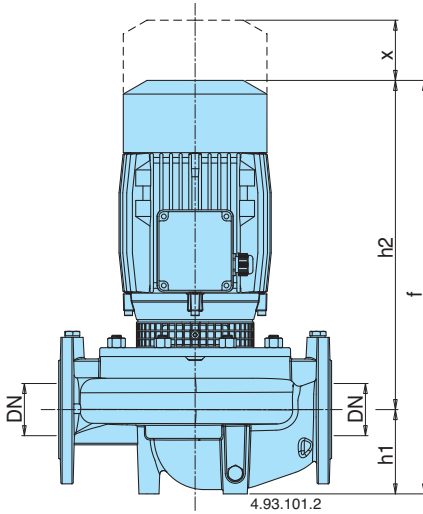

| TYPE | mm | | | | | | | | | | kg |
|----------------------|----|-----|-----|-----|-----|----|-----|-----|-----|-----|----------------|
| | DN | a | f | h1 | h2 | Øb | l | l1 | l2 | x | |
| NR 50D/A-C/A | 50 | 320 | 360 | 90 | 270 | 98 | 111 | 93 | 100 | 70 | 29,5-30 |
| NR 40/125A-B-C | 40 | 320 | 420 | 81 | 339 | - | 128 | 93 | 98 | 100 | 29,5-27,5-26,5 |
| NR 50/125C-F | 50 | 340 | 437 | 90 | 347 | - | 128 | 96 | 115 | 75 | 31,5-29,5 |
| NR 50/125A/A | 50 | 340 | 477 | 90 | 387 | - | 128 | 96 | 115 | 75 | 36,1 |
| NR 50/160C/A | 50 | 340 | 480 | 90 | 390 | - | 128 | 120 | 128 | 75 | 41,6 |
| NR 50/160A/A-B/A | 50 | 340 | 506 | 90 | 416 | - | 138 | 120 | 128 | 75 | 51,8-50,5 |
| NR 50/200D/A | 50 | 440 | 516 | 100 | 416 | - | 138 | 140 | 140 | 80 | 59,7 |
| NR 50/200A/A-B/A | 50 | 440 | 544 | 100 | 444 | - | 160 | 140 | 140 | 80 | 77,2-69,7 |
| NR 50/250B/A-C/A | 50 | 440 | 657 | 100 | 557 | - | 185 | 175 | 175 | 85 | 121-114 |
| NR 50/250A/A | 50 | 440 | 732 | 100 | 632 | - | 185 | 175 | 175 | 85 | 149,5 |
| NR 65/125F/A | 65 | 340 | 494 | 105 | 389 | - | 128 | 121 | 145 | 95 | 46 |
| NR 65/125S/A-A/A-D/A | 65 | 340 | 520 | 105 | 415 | - | 138 | 121 | 145 | 95 | 56,1-56,1-54,6 |
| NR 65/160A/A-B/A | 65 | 340 | 552 | 105 | 447 | - | 160 | 121 | 142 | 95 | 74-67,5 |
| NR 65/200A/A-B/A | 65 | 475 | 666 | 105 | 561 | - | 185 | 140 | 153 | 90 | 114-108 |
| NR 65/200S/A | 65 | 475 | 741 | 105 | 636 | - | 185 | 140 | 153 | 90 | 142,5 |
| NR 65/250C/A | 65 | 475 | 672 | 105 | 567 | - | 185 | 175 | 175 | 90 | 134 |
| NR 65/250A/A-B/A | 65 | 475 | 747 | 105 | 642 | - | 185 | 175 | 175 | 90 | 161-155 |


| TYPE | mm | | | | | | | | | | kg |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------------|
| | DN | a | f | h1 | h2 | Øb | l | l1 | l2 | x | |
| NR4 50A/A-B/A-C/A | 50 | 320 | 360 | 90 | 270 | 98 | 111 | 93 | 100 | 70 | 24-24-24 |
| NR4 65A/A-B/A-C/A | 65 | 360 | 370 | 100 | 270 | 118 | 111 | 102 | 114 | 70 | 28-28-28 |
| NR4 100B/A-C/A | 100 | 500 | 523 | 150 | 373 | 162 | 128 | 153 | 173 | 105 | 59-59 |
| NR4 100A/A | 100 | 500 | 549 | 150 | 399 | 162 | 138 | 153 | 173 | 105 | 67 |
| NR4 125C/A | 125 | 600 | 589 | 170 | 419 | 194 | 138 | 172 | 195 | 120 | 91,5 |
| NR4 125A/A-B/A | 125 | 600 | 608 | 160 | 438 | 194 | 160 | 172 | 195 | 120 | 110-108 |
| NR4 50/160A/A-B-C | 50 | 340 | 440 | 90 | 350 | - | 128 | 120 | 128 | 75 | 37,5-35,5-33,5 |
| NR4 50/200A/A-B/A | 50 | 440 | 490 | 100 | 390 | - | 128 | 140 | 140 | 80 | 56 |
| NR4 50/250B/A-C/A | 50 | 440 | 516 | 100 | 416 | - | 138 | 175 | 175 | 85 | 80-77,5 |
| NR4 50/250A/A | 50 | 440 | 545 | 100 | 445 | - | 160 | 175 | 175 | 85 | 93,5 |
| NR4 65/125S/A-A/A-D-F | 65 | 340 | 454 | 105 | 349 | - | 128 | 121 | 145 | 95 | |
| NR4 65/160A/A-B/A | 65 | 340 | 497 | 105 | 392 | - | 128 | 121 | 142 | 95 | 42,7-42,5 |
| NR4 65/200C/A | 65 | 475 | 510 | 105 | 405 | - | 128 | 140 | 153 | 90 | 52 |
| NR4 65/200A/A-B/A | 65 | 475 | 536 | 105 | 431 | - | 138 | 140 | 153 | 90 | 64,5-60 |
| NR4 65/250C/A-D/A | 65 | 475 | 526 | 105 | 421 | - | 138 | 175 | 175 | 90 | 75,5-75,5 |
| NR4 65/250A/A-B/A | 65 | 475 | 555 | 105 | 450 | - | 160 | 175 | 175 | 90 | 98-85 |

Flanges PN 10, EN 1092-2



| DN | mm | | | | |
|-----|-----|-----|-----|----------|----|
| | C | K | D | Holes N° | g2 |
| 50 | 99 | 125 | 165 | 4 19 | 20 |
| 65 | 118 | 145 | 185 | 4 19 | 20 |
| 80 | 132 | 160 | 200 | 8 19 | 22 |
| 100 | 156 | 180 | 220 | 8 19 | 24 |
| 125 | 184 | 210 | 250 | 8 19 | 24 |

Installation

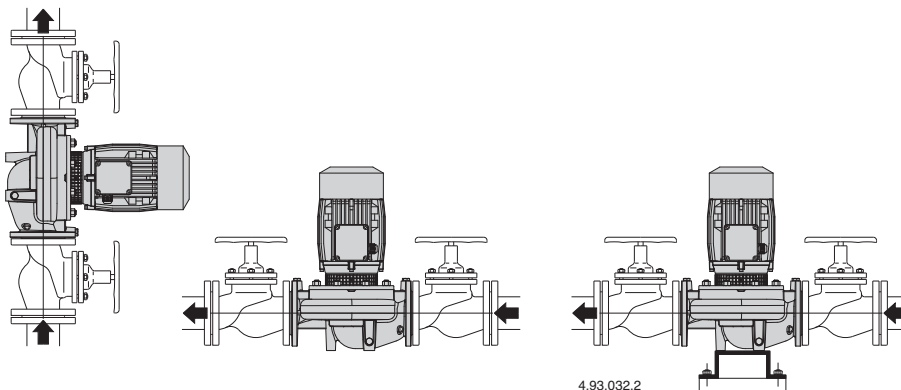

Features

NEW COMPACT DESIGN

A compact structure allows for simple installation even in confined spaces

A UNIQUE DESIGN

An innovative guard (patented) prevents contact with rotating parts, providing protection to the end user whilst allowing for inspection of the mechanical seal.

ADVANCED HYDRAULICS

Optimum impeller geometry provides maximum efficiency and excellent suction characteristics.

SILENT OPERATION

Specially designed fluid ducts provide very quiet operation

EXCEPTIONAL FLUID DYNAMICS

The fluid dynamics through the impeller and casing are designed to minimize losses and increase performance.

