

PS Range Domestic Drainage Pumps

Application

- Domestic drainage
- Small scale agricultural drainage

Max submersion depth = 7m
 Max particle size = 30mm
 Pipe outlet dia. = 25mm / 1"
NOT FOR CONTINUOUS DUTY

Pump


- Max. immersion depth: 7 m
- Max. liquid temperature: 40 °C
- Liquid pH value: 4-10
- Max. Particle size: 30mm

Motor

- Copper winding
- Insulation Class: B
- Protection Class: IPX8



Performance Chart @ 2850rpm

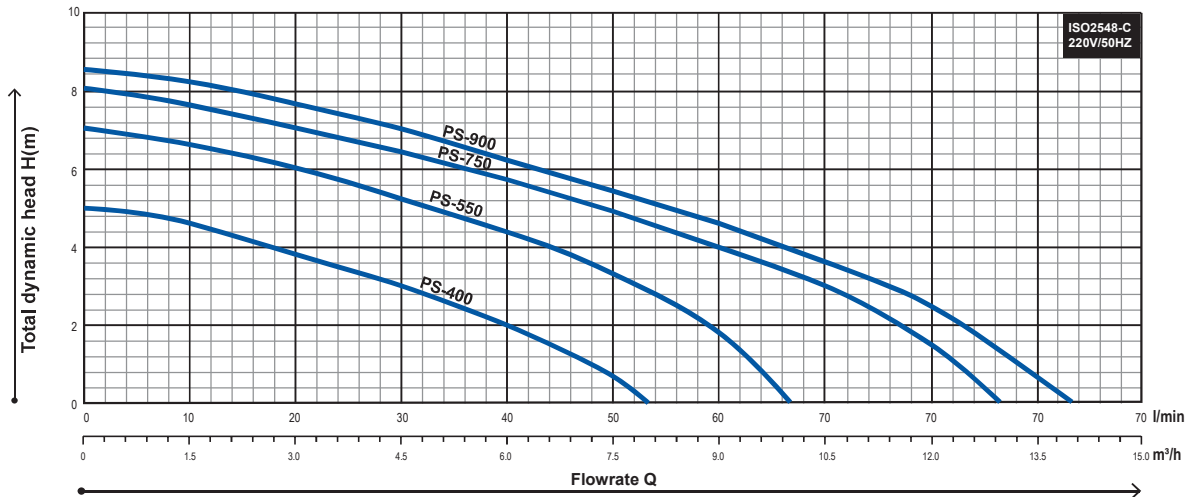

Technical Data (220~240V/50HZ)

Model	PS-400	PS-550	PS-750	PS-900
Nominal output	0.4kW	0.55 kW	0.75kW	0.9 kW
Protection type	IPX8	IPX8	IPX8	IPX8
Max. supply height	5 m	7 m	8 m	8.5 m
Max. conveying amount	8000 l/h	10000 l/h	13000 l/h	14000 l/h
Max. submersion depth	7 m	7 m	7 m	7 m
Max. Grain size	30 mm	30 mm	30 mm	30 mm