
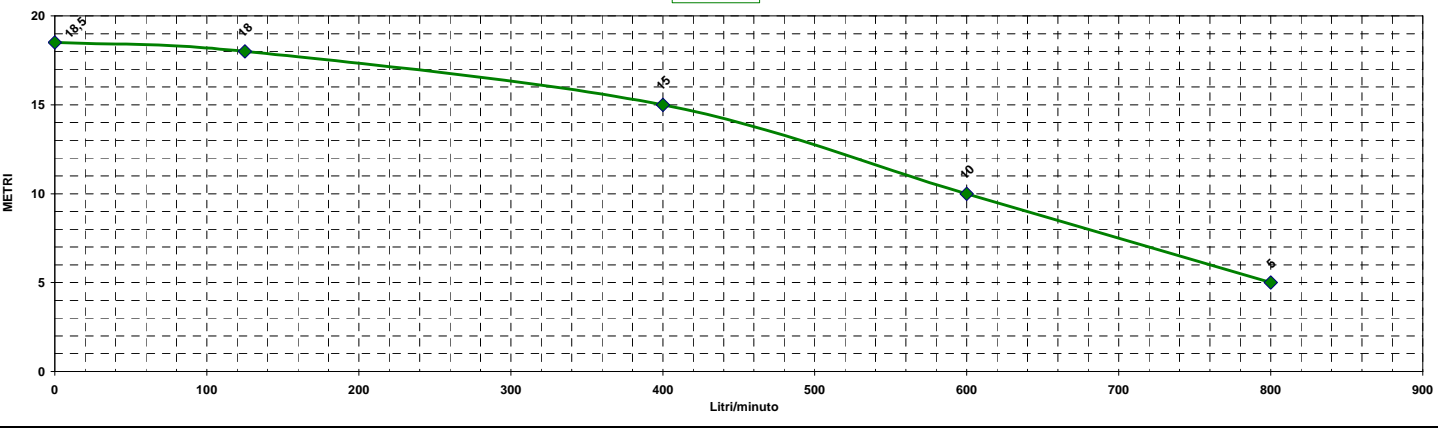



03"RA/SG-T	23424.00	230/400 v	400/690 v	ALPHA $\alpha$ POMPE s.p.a.	0,040				
	23435.00	230/400 v ATEX	400/690 v ATEX						
	/		230 v MONOFASE						
TIPO POMPA	CODICE		TENSIONE		ALPHA POMPE SPA Via Molino Emili n°16 25030 MACCLODI O (BS) Italy	COEFF. SIGMA			
 <p>ELETTROPOMPA AUTOADESCANTE SELF-PRIMING ELECTRIC PUMP ELECTROPOMPE AUTO-AMORÇANTE</p>	PRESTAZIONI		ASSORBIMENTO		POTENZA ASSORBITA	RENDIMENTO ENERGETICO	VELOCITA' USCITA	NPSHr	
	Q (l/min)	H (m)	AMPERE		WATT	%	mt/sec	mt.	
	0	18,5			1727	0,0	0,00	0	
	125	18			1919	19,2	0,40	0,07	
	400	15			2132	46,0	1,28	0,32	
	600	10			2369	41,4	1,92	0,79	
800	5			2493	26,2	2,57	2,62		
POMPA									
ASPIRAZIONE	80	3" GAS	DIAM. TUBAZIONE	81,35	GIRANTE APERTA / OPEN / OUVERTE	Ø 117	ALTEZZA PALE 23	N°PALE 5	PASSAGGIO SOLIDI Ø 21
MANDATA	80	3" GAS	DIAM. TUBAZIONE	81,35					
MOTORE									
POTENZA MOTORE (HP)	3	NUMERO GIRI	2800	CONDENSATORE	/	COS. F.	0,82	RENDIMENTO MOTORE	0,77
POTENZA MOTORE (KW)	2,208								

CURVE


PRESTAZIONI




ASSORBIMENTO 230/400 V / 400/690 V

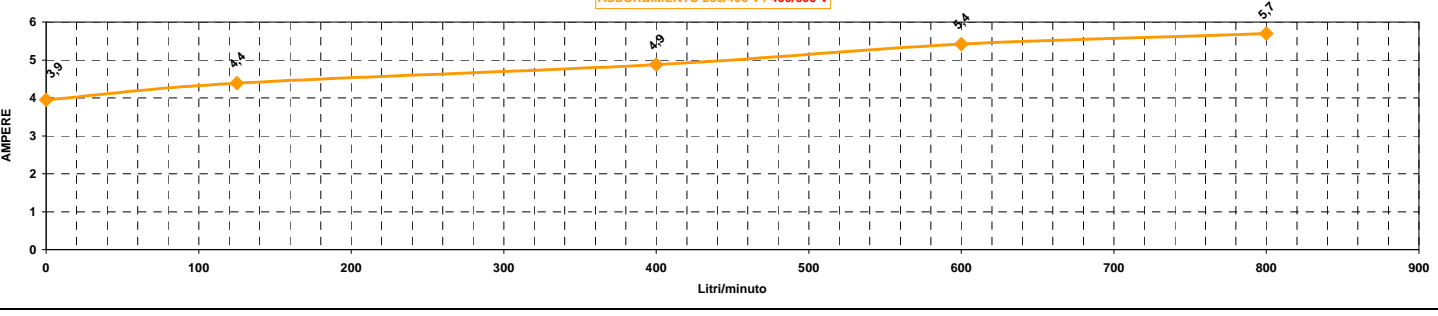

POTENZA UTILE / POTENZA ASSORBITA

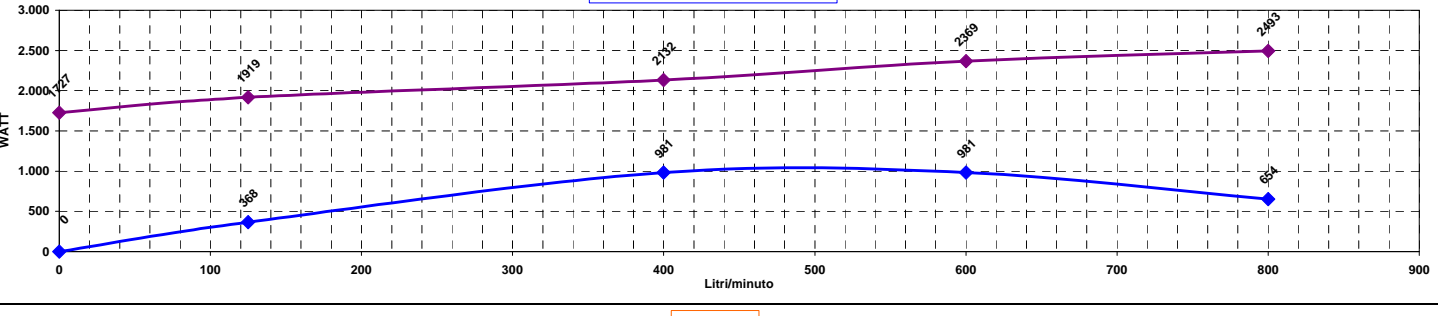

RENDIMENTO

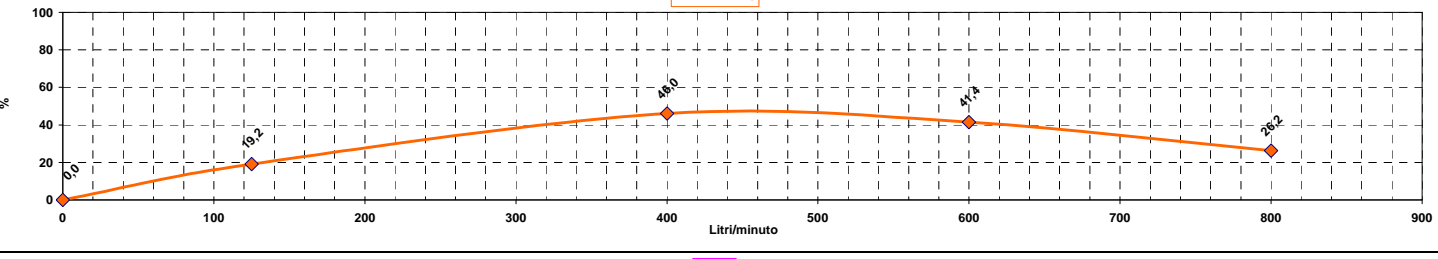

NPSHr

