





02" 1/2 RA-T	22813.00		230/400 v	400/690 v		0,090			
	22810.00		230/400 v ATEX	400/690 v ATEX					
	/						230 v MONOFASE		
TIPO POMPA	CODICE		TENSIONE		ALPHA POMPE SPA Via Molino Emili n°16 25030 MACCLODI O (BS) Italy	COEFF. SIGMA			
 <p>ELETTROPOMPA AUTODESCANTE SELF-PRIMING ELECTRIC PUMP ELECTROPOMPE AUTO-AMORÇANTE</p>	PRESTAZIONI		ASSORBIMENTO		POTENZA ASSORBITA	RENDIMENTO ENERGETICO	VELOCITA' USCITA	NPSHr	
	Q (l/min)	H (m)	AMPERE		WATT	%	mt/sec	mt.	
	0	18,5			0	0,0	0,00	0	
	100	18			294	7,6	15,3	0,44	0,12
	300	16			785	8,5	36,8	1,33	0,50
	440	13			935	9,4	39,5	1,95	0,99
550	9			809	9,9	5,7	24,4	1,96	
POMPA									
ASPIRAZIONE	65	2" 1/2 GAS	DIAM. TUBAZIONE	69,25	GIRANTE APERTA / OPEN / OUVERTE	Ø 117	ALTEZZA PALE 21	N°PALE 5	PASSAGGIO SOLIDI Ø 19
MANDATA	65	2" 1/2 GAS	DIAM. TUBAZIONE	69,25					
MOTORE									
POTENZA MOTORE (HP)	3	NUMERO GIRI	2800	CONDENSATORE	/	COS. F.	0,82	RENDIMENTO MOTORE	0,77
POTENZA MOTORE (KW)	2,208								

CURVE


PRESTAZIONI

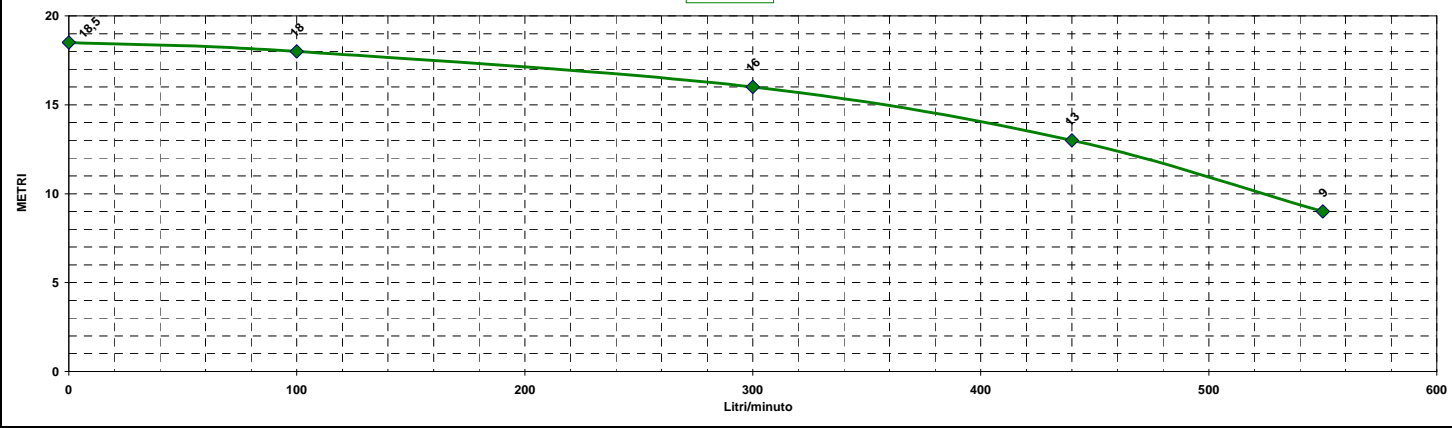


ASSORBIMENTO 230/400 V / 400/690 V

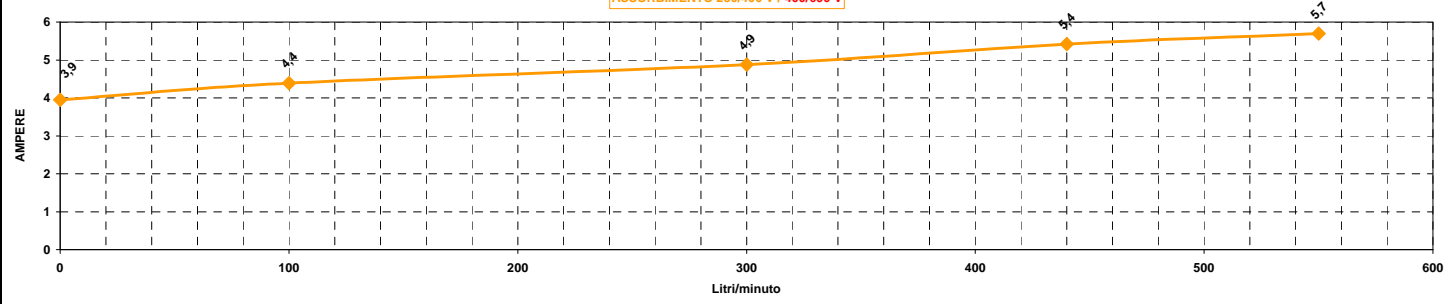

POTENZA UTILE / POTENZA ASSORBITA

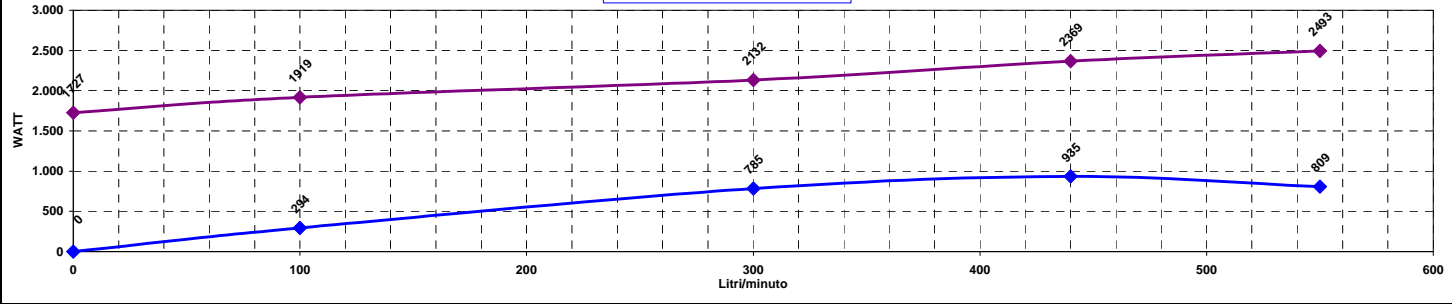

RENDIMENTO

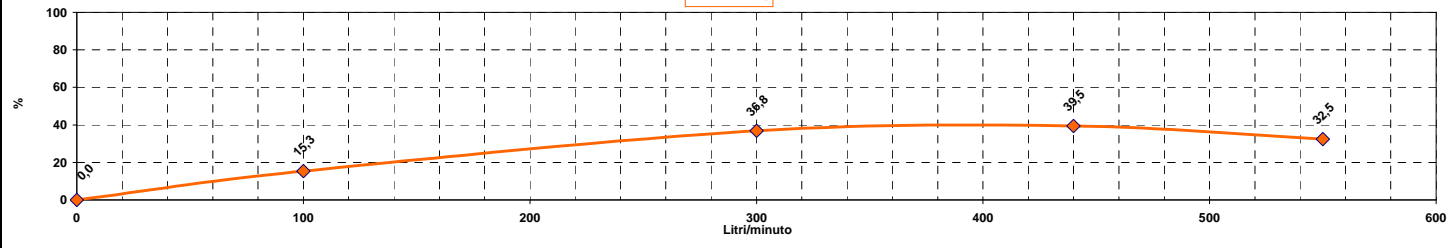

NPSHr

